


■特点 Features


标准的D × L × H mm封装形式
小公差及高稳定性同时具备低成本
包装：每塑料袋1000PCS，每盒包装10000PCS
Typical D × L × H mm standard package
Tight tolerance and Stability and low cost
Packing：each bag of 1000 pcs,each box of 10000 pcs

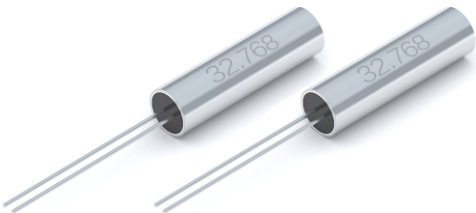

■标准规格 Electronic Specification

型号 Type	圆柱形 时钟晶体
额定频率 Rated frequency	32.768kHz
调整频差 Frequency Tolerance(at25℃)	± 10ppm, ± 20ppm, ± 50ppm
工作温度 Operating Temperature Range	− 20℃~+70℃
贮存温度 Storage Temperature Range	− 40℃~+85℃
拐点温度 Inflection point temperature	+25℃ ± 5℃
负载电容 Load Capacitance	6pF, 7pF, 9pF, 12.5pF
激励电平 Dtiwel Level	0.1uW Typ
频率温度系数 Frequency temperature coefficient	−0.04 × 10 ⁻⁶ /℃°Max
串联电阻 Equivalent Series Resistance	"50 or 60 kΩ Max.(30 kΩ Typ.)"
串联电容 Equivalent Series Capacitance	2.0fF Typ.
静态电容 Shunt Capacitance	0.85pF Typ.
老化率 Aging	± 5 × 10 ⁻⁶ /year Max. (第一年)

■外型尺寸 Outline Dimensions(Unit:mm)

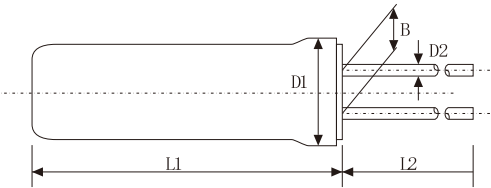

型号	L1	L2	D1	D2	B
JU206	6.0 ± 0.2	10.0 ± 0.5	φ 2.1 ± 0.08	φ 0.2 ± 0.05	0.7 ± 0.2
JU308	8.0 ± 0.2	10.0 ± 0.5	φ 3.1 ± 0.08	φ 0.3 ± 0.05	1.1 ± 0.2

该产品在过回流焊时最高温度 < 230℃，并且过回流焊次数 < 2次。